


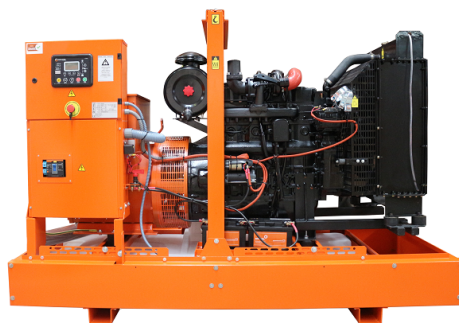

INDUSTRIAL RANGE

1 MAIN FEATURES

T Triphasic	 Diesel fuel	 Iveco / N45 SM1A	 Leroy somer / TAL042G	 / G-545
--------------------	---	--	---	---

Hz 50Hz	 1500 r.p.m.	V 400V	cos φ 0,8
----------------	---	---------------	------------------

Standby power (STP)	55 kVA	44 kW
Prime Power (PRP)	50 kVA	40 kW
Power Continuous (COP)	- kVA	- kW

Hz 60Hz	 1800 r.p.m.	V 480V	cos φ 0,8
----------------	--	---------------	------------------

Standby power (STP)	69 kVA	55 kW
Prime Power (PRP)	63 kVA	50 kW
Power Continuous (COP)	- kVA	- kW


OPEN SKID

Length (L)	2315 mm
Height (H)	1570 mm
Width(W)	995 mm
Weight	856 kg
Daily tank	200 L



SOUNDPROOF

Length (L)	2315 mm
Height (H)	1570 mm
Width (W)	995 mm
Weight	1351 kg
Daily tank	200 L



	50Hz	60Hz
Acoustic pressure level @1m	-	-
Acoustic pressure level @7m	-	-

	50Hz	60Hz
Acoustic pressure level @1m	74 dB(A)	76 dB(A)
Acoustic pressure level @7m	61 dB(A)	63 dB(A)

AVAILABLE VOLTAGES - 50Hz

FP (cos Ø)	Phase	Voltage	COP (kVA/kW)	PRP (kVA/kW)	STP (kVA/kW)	Circuit breaker (A)
0,8	Three-phase	440	- / -	43 / 34	47 / 38	63
1	Three-phase	440	- / -	34 / 34	38 / 38	50
0,8	Three-phase	415	- / -	50 / 40	55 / 44	80
1	Three-phase	415	- / -	40 / 40	44 / 44	63
0,8	Three-phase	400	- / -	50 / 40	55 / 44	80
1	Three-phase	400	- / -	40 / 40	44 / 44	63
0,8	Three-phase	380	- / -	48 / 38	52 / 42	80
1	Three-phase	380	- / -	38 / 38	42 / 42	63
0,8	Three-phase	240	- / -	50 / 40	55 / 44	125
1	Three-phase	240	- / -	40 / 40	44 / 44	100
0,8	Three-phase	230	- / -	50 / 40	55 / 44	125
1	Three-phase	230	- / -	40 / 40	44 / 44	100
0,8	Three-phase	220	- / -	43 / 34	47 / 38	125
1	Three-phase	220	- / -	34 / 34	38 / 38	100
0,8	Single phase	230	- / -	30 / 24	33 / 26	160
1	Single phase	230	- / -	24 / 24	26 / 26	125
0,8	Single phase	230	- / -	30 / 24	33 / 26	160
1	Single phase	230	- / -	24 / 24	26 / 26	125
0,8	Single phase	220	- / -	30 / 24	33 / 26	160
1	Single phase	220	- / -	24 / 24	26 / 26	125

AVAILABLE VOLTAGES - 60Hz

FP (cos Ø)	Phase	Voltage	COP (kVA/kW)	PRP (kVA/kW)	STP (kVA/kW)	Circuit breaker (A)
0,8	Three-phase	480	- / -	63 / 50	69 / 55	80
1	Three-phase	480	- / -	50 / 50	55 / 55	63
0,8	Three-phase	440	- / -	60 / 48	65 / 52	80
1	Three-phase	440	- / -	48 / 48	52 / 52	63
0,8	Three-phase	416	- / -	57 / 45	62 / 50	80
1	Three-phase	416	- / -	45 / 45	50 / 50	63
0,8	Three-phase	380	- / -	52 / 41	57 / 45	80
1	Three-phase	380	- / -	41 / 41	45 / 45	63
0,8	Three-phase	240	- / -	63 / 50	69 / 55	160
1	Three-phase	240	- / -	50 / 50	55 / 55	125
0,8	Three-phase	220	- / -	60 / 48	65 / 52	160
1	Three-phase	220	- / -	48 / 48	52 / 52	125
0,8	Three-phase	208	- / -	57 / 45	62 / 50	160
1	Three-phase	208	- / -	45 / 45	50 / 50	125
0,8	Single phase	240	- / -	34 / 27	38 / 30	160
1	Single phase	240	- / -	27 / 27	30 / 30	125
0,8	Single phase	240	- / -	34 / 27	37 / 30	160
1	Single phase	240	- / -	27 / 27	30 / 30	125
0,8	Single phase	230	- / -	34 / 27	38 / 30	160
1	Single phase	230	- / -	27 / 27	30 / 30	125
0,8	Single phase	230	- / -	27 / 27	30 / 30	125
1	Single phase	220	- / -	27 / 27	30 / 30	125

2 ROOM INSTALLATION

EXHAUST SYSTEM	50 Hz			60 Hz		
	COP	PRP	STP	COP	PRP	STP
Exhaust gas temperature (°C)	-	483	-	-	385	-
Exhaust gas flow (kg/h)	-	-	325	-	-	431
Evacuated Heat (kW)	-	41,5	45,7	-	51,3	56,3
Maximum back pressure (kPa)	5					
Exhaust silencer attenuation (dB)	18-25					
Output Diameter (mm)	90					

VENTILATION SYSTEMS	50 Hz			60 Hz		
	COP	PRP	STP	COP	PRP	STP
Combustion air flow (m³/min)	-	4,3	-	-	5,8	-
Cooling airflow (m³/min)	111,6			138		
Maximum load losses (Pa)	147					
RADIATION	50 Hz			60 Hz		
	COP	PRP	STP	COP	PRP	STP
Engine (kW)	5,3	5,3	5,8	10	10	11
Alternator (kW)	4,2	4,2	4,8	4,9	4,9	5,6
Alternator (kW)	2,7	2,7	3,1	3,3	3,3	3,8

3 ENGINE SPECIFICATIONS

GENERAL SPECIFICATIONS	50 Hz	60 Hz
Model	N45 SM1A	
Emissions	Not satisfy 97/68/EC	
Performance grade	G2	
Operating method	Four stroke	
Fuel type	Diesel fuel	
Refrigeration system	Water/antifreeze Closed Circuit	
Aspiration system	Turbocharged	
Injection system	Direct	
No. and Cylinder arrangement	4 In-Line	
Displacement (L)	4,5	
Cylinder bore (mm)	104	
Cylinder stroke (mm)	132	
Compression Ratio	17,5:1	
Regulation	Mechanic / optional electronic	
Rotation speed	1500	1800
Piston Speed (m/s)	6,6	7,9
Gross power COP (kWm)	-	-
Gross power PRP (kWm)	54,6	61
Gross power STP (kWm)	59,3	67
Fan power (kWm)	1,2	2
Net Power COP (kWm)	-	-
Net Power PRP (kWm)	54,1	59
Net Power STP (kWm)	58,8	65
BMEP COP (kPa)	-	-
BMEP PRP (kPa)	970	902
BMEP STP (kPa)	1067	993




CONSUMPTION		50Hz		60Hz	
Fuel consumption	LOAD	lt/h	g/kWh	lt/h	g/kWh
STP	100%	15	210	16,9	211,9
	100%	13,7	210,8	15,5	213,4
	75%	10,2	210,2	11,7	214,5
PRP	50%	7	216,3	8,2	226,6
	100%	-	-	-	-
	75%	-	-	-	-
COP	50%	-	-	-	-
	50%	-	-	-	-
Oil consumption		< 0,1% of fuel consumption			
REFERENCE CONDITIONS					
Temperature (°C)		40			
Atmospheric pressure (kPa)		100			
CAPACITY					
Coolant (L)		18,5			
Oil (L)		12,8			
STARTING SYSTEM					
Voltage (V)		12			
Power (kW)		3			
Battery (Ah)		100			

4 ALTERNATOR SPECIFICATIONS

GENERAL SPECIFICATIONS	
Model	TAL042G
Phases No.	Triphasic
Protection	IP23
Insulation	H
Temperature Rise	H
50Hz R.F.I. telephone interference	THF<2%
60Hz R.F.I. telephone interference	TIF<50
R.F.I. Suppression	CEM 2014/30/UE
Coupling	Semi-Flexible

Wave form distortion with no load	< 3,5%
Wave form distortion with balanced linear load	< 5%
Winding Leads	6
Excitation (standard / option)	SHUNT / AREP
AVR Model (standard / option)	R120 / R180



INDUSTRIAL RANGE

RATED POWER - 50Hz								RATED POWER - 60Hz							
FP (cos Ø)	Phase	Voltage (V)	Power PRP/STP (kVA)	Efficiency PRP/STP (%)	Xd	X'd	X''d	FP (cos Ø)	Phase	Voltage (V)	Power PRP/STP (kVA)	Efficiency PRP/STP (%)	Xd	X'd	X''d
0,8	Three-phase	440	43 / 47	89,8 / 89,5	2,010	0,100	0,050	0,8	Three-phase	480	63 / 69	90,2 / 89,8	2,950	0,148	0,074
1	Three-phase	440	34 / 38	93,0 / 93,0	2,010	0,100	0,050	1	Three-phase	480	50 / 55	93,4 / 93,2	2,950	0,148	0,074
0,8	Three-phase	415	50 / 55	89,7 / 89,2	2,620	0,131	0,065	0,8	Three-phase	440	60 / 65	90,0 / 89,5	3,350	0,167	0,083
1	Three-phase	415	40 / 44	93,2 / 93,0	2,620	0,131	0,065	1	Three-phase	440	48 / 52	93,2 / 92,9	3,350	0,167	0,083
0,8	Three-phase	400	50 / 55	89,6 / 89,1	2,830	0,142	0,071	0,8	Three-phase	416	57 / 62	89,8 / 89,3	3,550	0,178	0,089
1	Three-phase	400	40 / 44	93,2 / 92,9	2,830	0,142	0,071	1	Three-phase	416	45 / 50	93,1 / 92,8	3,550	0,178	0,089
0,8	Three-phase	380	48 / 52	89,6 / 89,1	2,980	0,149	0,074	0,8	Three-phase	380	52 / 57	89,3 / 88,8	3,880	0,194	0,097
1	Three-phase	380	38 / 42	93,2 / 92,9	2,980	0,149	0,074	1	Three-phase	380	41 / 45	92,7 / 92,4	3,880	0,194	0,097
0,8	Three-phase	240	50 / 55	89,7 / 89,2	2,620	0,131	0,065	0,8	Three-phase	240	63 / 69	90,2 / 89,8	2,950	0,148	0,074
1	Three-phase	240	40 / 44	93,2 / 93,0	2,620	0,131	0,065	1	Three-phase	240	50 / 55	93,4 / 93,2	2,950	0,148	0,074
0,8	Three-phase	230	50 / 55	89,6 / 89,1	2,830	0,142	0,071	0,8	Three-phase	220	60 / 65	90,0 / 89,5	3,350	0,167	0,083
1	Three-phase	230	40 / 44	93,2 / 92,9	2,830	0,142	0,071	1	Three-phase	220	48 / 52	93,2 / 92,9	3,350	0,167	0,083
0,8	Three-phase	220	43 / 47	89,8 / 89,5	2,010	0,100	0,050	0,8	Three-phase	208	57 / 62	89,8 / 89,3	3,550	0,178	0,089
1	Three-phase	220	34 / 38	93,0 / 93,0	2,010	0,100	0,050	1	Three-phase	208	45 / 50	93,1 / 92,8	3,550	0,178	0,089
0,8	Single phase	230	30 / 33	79,8 / 78,6	1,480	0,170	0,090	0,8	Single phase	240	34 / 38	78,6 / 77,3	2,050	0,210	0,110
1	Single phase	230	24 / 26	86,4 / 85,7	1,480	0,170	0,090	1	Single phase	240	27 / 30	84,9 / 84,0	2,050	0,210	0,110
0,8	Single phase	230	30 / 33	79,9 / 78,8	1,760	0,171	0,085	0,8	Single phase	240	34 / 37	78,8 / 77,5	2,200	0,213	0,106
1	Single phase	230	24 / 26	86,4 / 85,8	1,760	0,171	0,085	1	Single phase	240	27 / 30	85,0 / 84,2	2,200	0,213	0,106
0,8	Single phase	220	30 / 33	79,8 / 78,6	1,620	0,190	0,090	0,8	Single phase	230	34 / 38	78,6 / 77,3	2,230	0,230	0,120
1	Single phase	220	24 / 26	86,4 / 85,7	1,620	0,190	0,090	1	Single phase	230	27 / 30	84,9 / 84,0	2,230	0,230	0,120
								1	Single phase	230	27 / 30	85,0 / 84,2	2,200	0,210	0,110
								1	Single phase	220	27 / 30	85,0 / 84,2	2,200	0,210	0,110

5

CONTROL PANEL



GENSET	GRUPEL G-545	OPTIONAL
Voltage (Ph-Ph / Ph-N)	• / •	• / •
Current intensity	•	•
Frequency	•	•
RMS values	•	•
Generator phase sequence	•	•
Generator earth current [a]	•	•
No. of registers events	400	250
Real time clock	•	•
PIN protection	•	•
kWh, kVAR, kVAh, kVArh, cos Ø	•	•
Synchroscope (m)	0	0
Nº of available outputs [b]	4	6
Engine run hours	•	•
Indication of alarms on LCD	•	•
Total no. of LED indicators	15	12
No. of LED alarms	4	4
Sound signalling alarms	-	0
Scheduler	•	•
Fuel Level	•	•

Electrical network	GRUPEL G-545	OPTIONAL
Voltage (Ph-Ph / Ph-N)	• / •	• / •
Current intensity [a]	0	0
Frequency	•	•
kVA,kW, cos Ø (a)	0	0
Inversion control between main-group	•	•
Protections and Alarms	GRUPEL G-545	OPTIONAL
High / low battery voltage	A	0
Failure in Battery Charge Alternator	A	0
Failure to stop	A/S	A/S
Failure to start	A/S	A/S
Low fuel level	A/S	A/S
Overload	A/S	A/S
Earth leakage	A/S	A/S
Asymmetry between phases	A/S	A/S
Maintenance	A/S	A/S
High / Low generator frequency	A/S	A/S
Engine overspeed	A/S	A/S
Engine underspeed	A/S	A/S
Generator overvoltage	A/S	A/S
Generator undervoltage	A/S	A/S
ECU Alert (if applicable)	A/S	A/S
Low oil pressure	A/S	A/S
Low level of radiator water [f]	A/S	A/S
Engine high temperature	A/S	A/S
Fuel leakage/ theft	A	0

6 CONTROL PANEL

Engine	GRUPEL G-545	OPTIONAL
Engine Speed	•	•
Low oil pressure protection	•	•
Oil pressure reading [c]	0	0
High temperature engine protection	•	•
Engine temperature reading [c]	0	0
Engine battery voltage	•	•
Intensity of the engine battery [d]	0	0
Fuel Consumption [e]	•	•
Low level of radiator water [f]	0	0
Engine maintenance scheduled	•	•
Communication	GRUPEL G-545	OPTIONAL
USB female type B plug (Max. 6m) [g]	•	•
USB female type A plug (n)	0	0
RS232 port (Max. 15m) (n)	0	0
RS485 port (Max. 1,2Km) [h]	•	•
Ethernet port RJ45 [i]	0	0
GSM and/or GPS [j]	0	0
ModBus RTU protocol [h]	•	•
ModBus TCP protocol [i]	0	0
SNMP protocol [l]	0	0
CAN port (Max. 40m)	•	•
MSC port (Max. 240m) (m)	0	0
PLC functionality	•	•

Applications	GRUPEL G-545	OPTIONAL
Automatic or manual starting	•	•
Remote start by NO dry contact	•	•
Automatic by mains failure	•	•
Alternating with timesharing	•	•
Multi-generators synchronization and load sharing (Max. 32 generators) (m)	0	0
Generator-Main in synchronism and load sharing (1 generator and 1 main) (m)	0	0
Optional expansions	GRUPEL G-545	OPTIONAL
DSE2130 (8 inputs dig.) IG-IOM (8 in/outputs dig. + 4 inputs anal.) G-08 (8 inputs dig.)	•	•
DSE2157 I-RB8 G-06 (8 relay outputs)	•	•
DSE890 IL-NT-GPRS G-GSM (GSM and/or GPS)	•	•
DSE891 IB-LITE G-ETH (ethernet module)	•	•
DSE892 IB-LITE - (ethernet module according SNMP protocol)	-	0
DSE2548 IGL-RA15 - (expansion with 8 additional LEDs)	-	0
DSE2510 / 20 (mirror controller, maximum distance 1km)	-	0
Standards		
Working temperature	-30 -> 70°C	
Protection index (when assembled with sealing gasket)	IP65	
Degree of humidity (during 48hr)	93% / 40°C	

Legend

•	Available
o	Optional
-	Not available
A	Warning Alarm
S	Stop alarm
[a]	Need additional CT
[b]	No. of outputs available for standard configuration. The outputs do not include relays and additional terminal connections.
[c]	If the information is not provided by the engine-ECU, you need an additional sensor

[d]	Needs additional ammeter
[e]	If information provided by the engine ECU
[f]	Required additional sensor
[g]	Requires the addition of the IL-NT-S-USB module
[h]	Requires the addition of the IL-NT-RS232-485 module
[i]	DeepSea: Requires the addition of the DSE891 module/ ComAp: Requires the addition of the IB-LITE module
[j]	DeepSea: Requires the addition of the DSE890 module/ ComAp: Requires the addition of the IL-NT-GPRS module
[l]	DeepSea: Requires the addition of the DSE892 module/ ComAp: Requires the addition of the IB-LITE module

Indicative weights and dimensions. Reference ambient conditions: 100kPa, 25°C, 30% relative humidity and fuel temperature below 40°C. Power in accordance with ISO 8528: Continuous power (PRP): Maximum available power to feed a variable electrical load for an unlimited period. The average of load factor in 24h of operation, shall not exceed 70% of the PRP. Admits 10% of overload during the maximum period of 1h every 12h of operation. The operation under overload shall not exceed 25h/year. Emergency Power (STP): Maximum available power to feed variable electrical load for a maximum period of 200h/year. The average of load factor in 24h of operation shall not exceed 70% of the STP. No overload. These specifications are subject to change without notice.

Distribuidor